

CONCRETE CONSTRUCTION NOTES:


- CONCRETE WALLS:
 - CONCRETE FOUNDATION WALLS 14" (2) #5 BARS TOP AND BOTTOM (CONTINUOUS UNLESS OTHERWISE NOTED ON PLAN)
 - MINIMUM 4" REBAR (CONTINUOUS)
 - 2" RIGID FOAM OVER WATERPROOFING MASTIC OVER CONCRETE (CONTINUOUS)
 - OVER WOOD STUDS ABOVE TO ROOF TRUSSES
 - 3/8" DIA. ANCHOR BOLTS EMBEDDED 1" @ 48" O/C AND 18" (MAX) FROM ALL CORNERS
- CONCRETE FOOTINGS:
 - ALL CONCRETE FOOTINGS AS SPECIFIED ON PLAN
 - CONC. WALL FOOTINGS ARE 24" W x 8" D (2) #5 BARS CONTINUOUS
 - KEY ALL FOOTINGS 3" W x 2" DEEP (SEE SECTIONS)
- CONCRETE SLABS (ALL):
 - 4" CONCRETE SLAB W/ 6x6 #8 WLF. AND 4" REBAR AROUND PERIMETER (INTERIOR AND EXTERIOR) CONCRETE SLABS (INTERIOR AND EXTERIOR)
 - CONCRETE SLABS (INTERIOR AND EXTERIOR) CONTROL JOINTS NOT TO EXCEED 15' MAX
 - SEE DRAWINGS AND SPECIFICATIONS FOR MORE INFO.

NOTES

- DIMENSIONS:
 - FROM FACE OF CONCRETE & FACE OF FRAMING

HEADER SCHEDULE

108	(2) 175x425 LVL
-----	-----------------

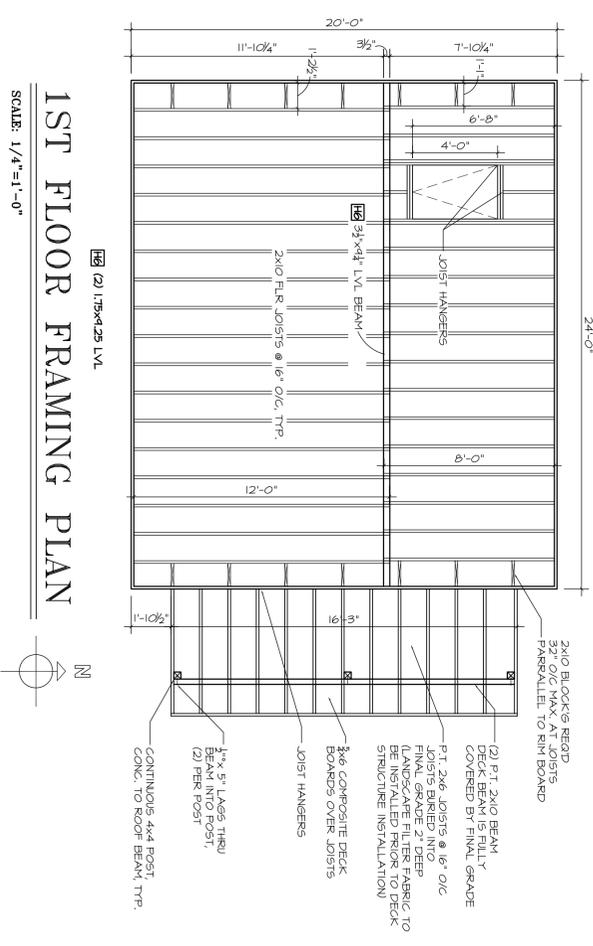

BUILD TO ENERGY STAR SPECIFICATIONS

Copyright © Chad Michael Cornette

CANTILEVER TDI DEVELOPMENT

CHAD CORNETTE
215 PLEASANT PLACE
DEFERIE, WI 54115
TEL: 920-339-9061
EM: CANTILEVER@USA.COM

JAMES F. OLSEN
130 MAIN STREET
SUITE 204
MENASHA, WI 54952
TEL: 920-722-9292



PROTOTYPE RESIDENCES FOR
NATURE'S WAY
CITY OF MENASHA

PROJECT NO.
R-NAT-06
DATE:
24 OCT 2006

SHEET

