
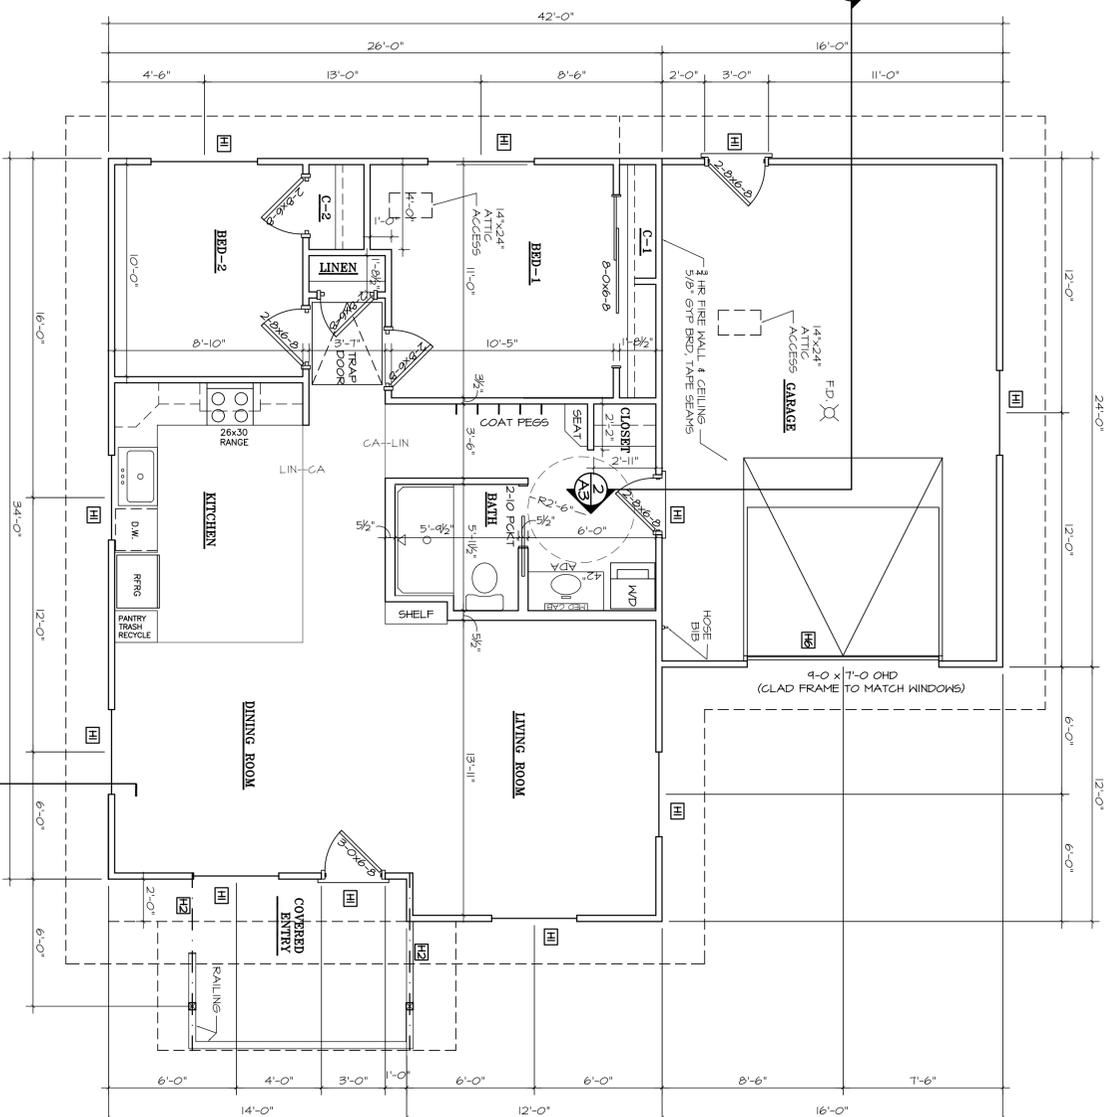




1ST FLOOR ELECTRIC PLAN

SCALE: 1/4"=1'-0"

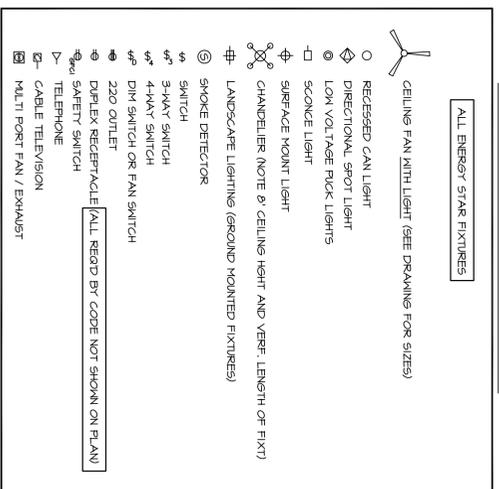

1ST FLOOR PLAN

SCALE: 1/4"=1'-0"
AREA = 908 SF (CONDITIONED)

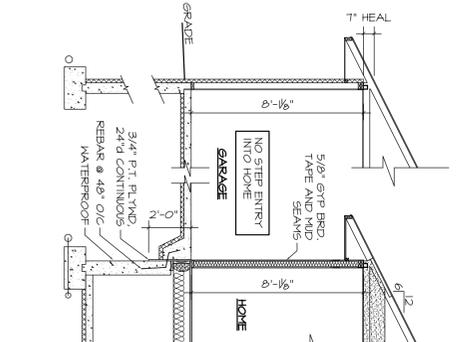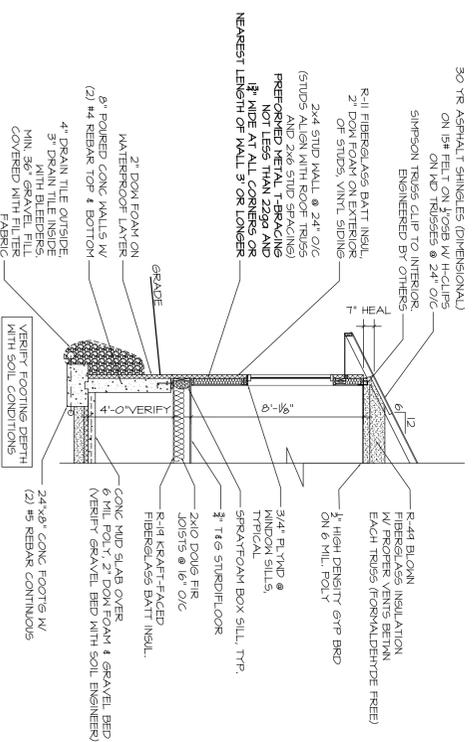

HEADER SCHEDULE

H1	(2) 2x6 @ 2 BTR
H2	(2) 2x4 @ 2 BTR
H3	(2) 175x4.25 LVL
H4	(2) 2x10 @ 2 BTR

WINDOW FRAMING NOTE:
3/4" PLYND @ WINDOW SILLS
& 2" RIGID FOAM SHEETING @
SEE SECTION TYPICAL

NOTES

- DIMENSIONS ARE FROM FACE OF FRAMING AND FACE OF CONCRETE
- INSULATED CRAWLSPACE (SEE SECTIONS)
- 1ST FLOOR EXTERIOR WALLS ARE 2x4x42" @ 24" O/C (ALIGN W/ ROOF TRUSSES)
- GARAGE WALLS ARE 2x4x42" (FASCIAS TO ALIGN) (ALIGN W/ ROOF TRUSSES)
- 1ST FLOOR WALLS ARE 2x4 @ 24" O/C
- 3/4" GYP BRD ON ALL WALLS, 1/2" HIGH DENSITY GYP BRD ON CEILINGS
- R-11 FIBERGLASS BATT IN EXTERIOR WALLS
- 2" RIGID DOM FOAM ON EXTERIOR WALLS (NO WOOD SHEETING)
- 1ST FLOOR WALLS AT ALL CORNERS OR WALL INTERSECT TO CORNER
IF WINDOW HEADS SPACE
- R-44 LOOSE-FILL INSULATION IN ROOF TRUSSES
- ENERGY STAR VINYL WINDOWS
- MECHANICAL, 90% EFFICIENCY FURNACE (ENERGY STAR LABEL RECOMMEND)